

# FLOORING INSTALLATION QUICK CHECK PLUS KIT




The Tramex IQCPK is a compact kit for instant, non-destructive, quantitative moisture content testing of concrete floors and ambient dew-point conditions at the time of installation. Even if pre-installation tests have been performed, checking the %MC and ambient dew-point conditions at the time of installation is crucial to ensure successful installation. The Tramex CMEX5 digital moisture meter allows for non-destructive quantitative testing of concrete moisture content using Gravimetric testing as a baseline. The CMEX5 has a built-in hygrometer providing ambient relative humidity, temperature and dew-point measurements. The Infrared Thermometer provides surface temperature readings for comparison with the dew-point conditions to avoid condensation-related issues at the time of installation and floor failures. The Tramex Flooring Installation Quick Check Plus Kit comes in a Tramex Easy-travel case.



FOR IOS & ANDROID DEVICES (PHONE NOT INCLUDED WITH KIT)

Product Code: IQCPK

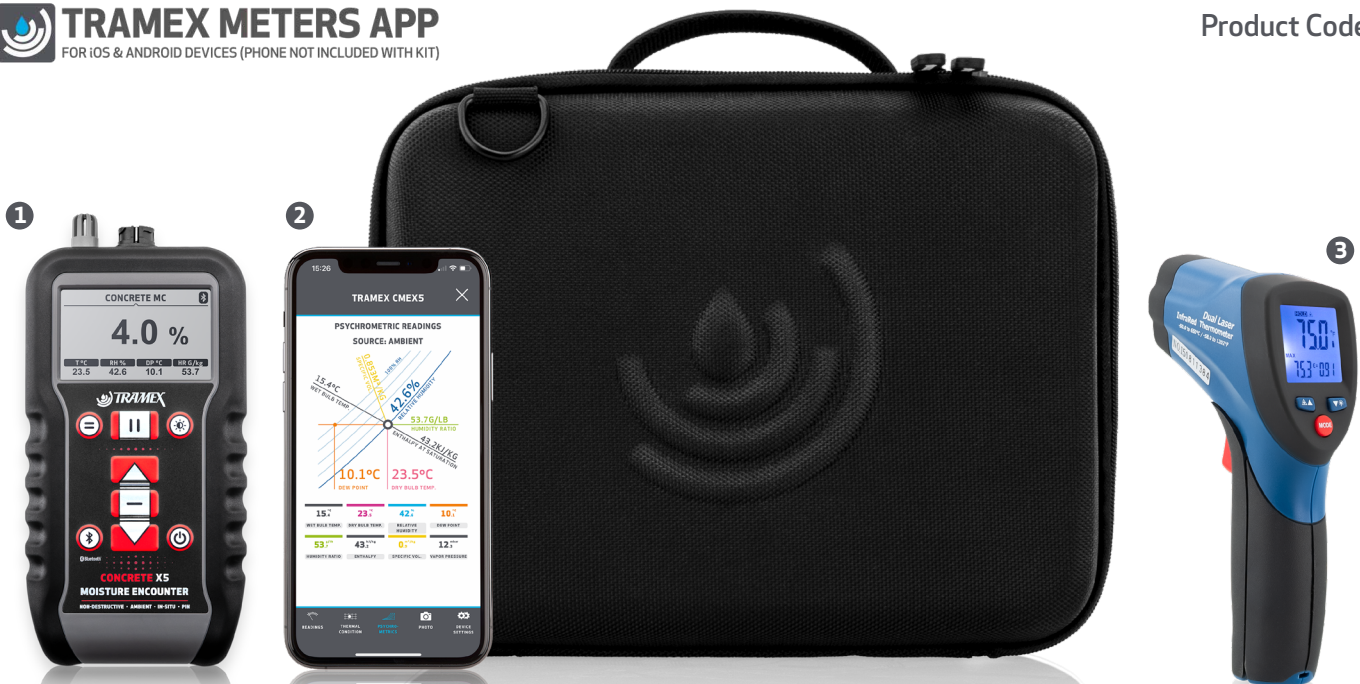


## KIT CONTENTS

1. Concrete Moisture Encounter X5 - CMEX5.
2. App available for Android and iOS (phone not included).
3. Infrared Thermometer



NON-DESTRUCTIVE



CONCRETE %MC  
READING RANGE



GYPSUM REFERENCE  
READING RANGE



CM EQUIV CONCRETE  
READING RANGE



CM EQUIV ANHYDRITE  
READING RANGE



AMBIENT  
RH, T, DP, g/kg



ACCOMPANYING  
APP



ASTM  
F2659

# SPECIFICATIONS

## CONCRETE MOISTURE ENCOUNTER X5 - SPECIFICATIONS & MEASURING RANGE



The Tramex Concrete Moisture Encounter X5 is a non-destructive digital multi moisture meter for concrete floors and slabs providing instant and precise quantitative measurement of moisture content using Gravimetric testing as a baseline. The CMEX5 also provides Carbide Method equivalent readings for concrete and other cementitious substrates as well as comparative readings as per ASTM F2659. Incorporating plug-in ports for the optional Hygro-i2® relative humidity probe testing per ASTM F2170 and heavy-duty pin-type wood probes, this moisture meter transforms into the ideal all-in-one instrument for the flooring professional.

|                                   |                                          |                                                   |                   |
|-----------------------------------|------------------------------------------|---------------------------------------------------|-------------------|
| Size:                             | 180mm x 85mm x 40mm (7.1" x 3.4" x 1.6") | Moisture content for Concrete:                    | 0 → 6.9 %         |
| Weight:                           | 357g (12.59oz)                           | Comparative for Gypsum floor screed:              | 0 → 12            |
| Construction:                     | ABS Body                                 | CM Equiv Anhydrite/Concrete:                      | 0 → 2.7 / 0 → 4.3 |
| Power:                            | 2 x AALR6 ALKALINE (included)            | Reference scale:                                  | 0 → 100           |
| Display:                          | Digital                                  | Relative Humidity                                 | 0 → 99%           |
| Depth of penetration in concrete: | approx. 20mm (3/4")                      | (with optional Hygro-i2® probe):                  |                   |
|                                   |                                          | Humidity accuracy: 0% to 99%RH +/- 2% @ 25°C/77°F |                   |
|                                   |                                          | Moisture content for wood                         |                   |
|                                   |                                          | (with optional wood pin probes):                  | 5 → 30 %          |

Free App Available for Mobile and Tablet:



## INFRARED THERMOMETER - IRT2 - SPECIFICATIONS & MEASURING RANGE



The IRT2 is a handheld, dual laser, non-contact Infrared Thermometer with 12:1 distance to spot ratio and audible and visible high/low set point alarms. It is used to measure and display surface temperatures within the range of -50°C to 650°C (-58°F to 1202°F) and has an accuracy of approximately 1 to 1.5% (see Specifications for details). The IRT2 has a fast response time (0.15 sec) and is powered with a 9V battery and complies with Class II UK/EU laser safety standard EN60285.

|                                                                                          |                                                     |
|------------------------------------------------------------------------------------------|-----------------------------------------------------|
| Temperature range:                                                                       | -50 to 650 °C (-58°F ~ 1202°F)                      |
| Distance to Spot ratio:                                                                  | D:S = 12:1                                          |
| Accuracy for targets assuming ambient operating temperature of 23 to 25 °C (73 to 77°F): |                                                     |
|                                                                                          | -50 ~ 20°C (-58°F ~ 68°F) ±2.5°C(4.5°F)             |
|                                                                                          | 20°C ~300°C (68°F ~572°F) ±1.0% ±1.0°C(1.8°F)       |
|                                                                                          | 300°C ~ 650°C (572°F ~ 1202°F) ±1.5%                |
| Emissivity:                                                                              | Digitally adjustable from 0.10 to 1.0               |
| Power supply:                                                                            | 9V battery, NEDA 1604A or IEC 6LR61, or equivalent. |

# SPECIFICATIONS


## KIT SPECIFICATIONS

Size: 35cm x 23cm x 90cm (13.8" x 9.1" x 3.5")

Weight:

1.3kg (2.8lbs)

Power: 2 x AA batteries, 1 x 9 volt PP3 battery

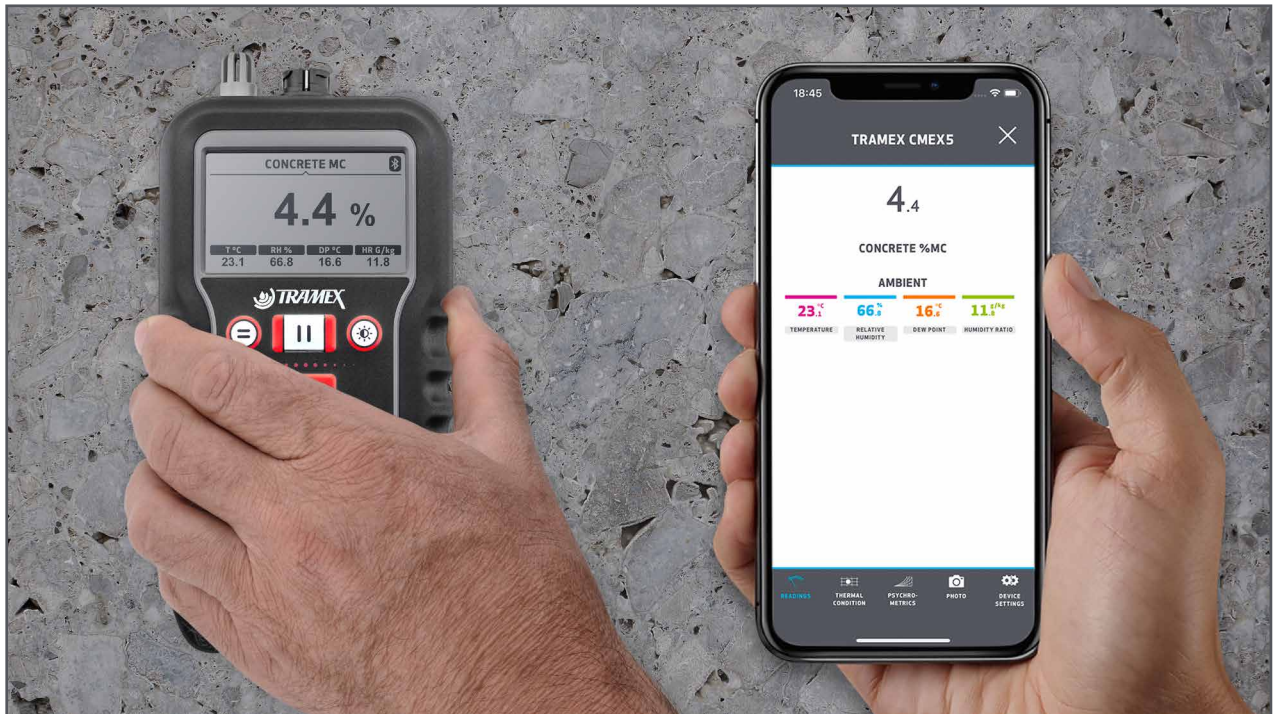

Distributed by:



**Checkline Europe GmbH & Co. KG**

Warschauerstrasse 8  
48455 Bad Bentheim  
Deutschland

Tel: +49 (0)5924 - 9999690  
Email: [verkauf@checkline.de](mailto:verkauf@checkline.de)  
Web: [www.checkline.de](http://www.checkline.de)

